


8BitDo

Ultimate 3-mode Controller for Xbox

English

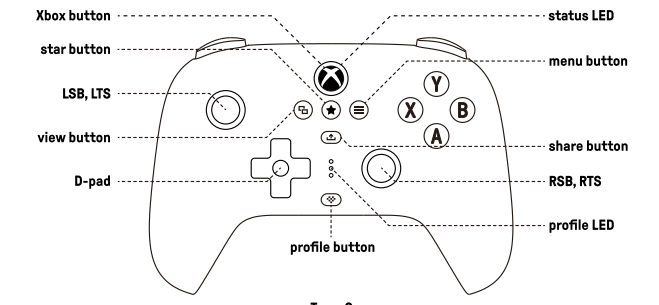

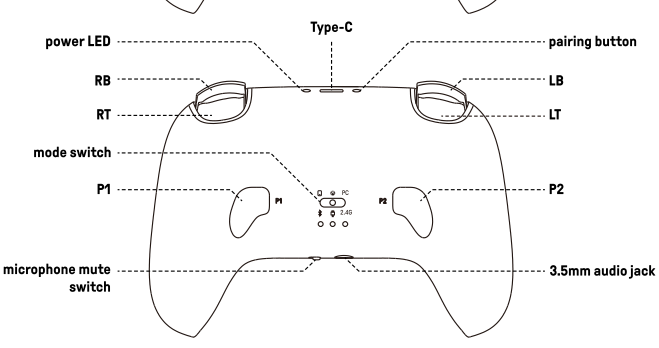

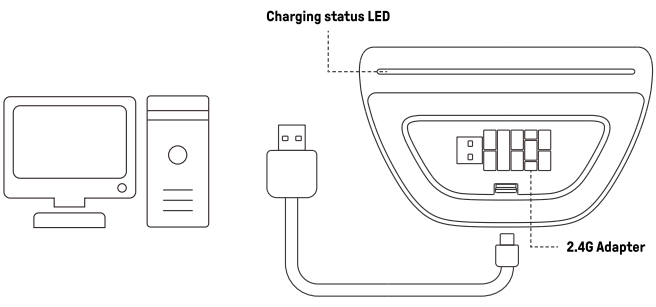

- Press the **Xbox button** to turn on the controller.
- Hold the **Xbox button** for 6 seconds to turn off the controller.
- Hold the **Xbox button** for 12 seconds to force the controller off.

Xbox Series/One console

- The latest system version of the Xbox console is required.

Wired Connection

1. Turn the **mode switch** to **Xbox/USB** position.
2. Connect the controller to your Xbox console via a USB cable.
3. Press the **Xbox button** to turn on the controller and wait till the controller is successfully recognized by the console. The **LED indicator** will stay solid when the connection is successful.

Windows 10/11

- Windows 10(1903) or above is required.

Wireless Connection

1. Connect the **2.4G adapter** to your Windows device.
2. Turn the **mode switch** to **PC/2.4G** position.
3. Press the **Xbox button** to turn on the controller and wait till the controller is successfully recognized by the device. Both **LED indicators** on the controller and the adapter will stay solid when the connection is successful.

Wired Connection

1. Turn the **mode switch** to **Xbox/USB** position.
2. Connect the controller to your Windows device via a USB cable.
3. Press the **Xbox button** to turn on the controller and wait till the controller is successfully recognized by the console. The **LED indicator** will stay solid when the connection is successful.

Android

- Android 9.0 or above is required.

Bluetooth Connection

1. Turn the mode switch to **Mobile/Bluetooth** position.
2. Press the **Xbox button** to turn on the controller.
3. Hold the **Pairing button** for 3 seconds to enter the pairing mode, the **LED indicator** will blink rapidly. (This is required for the very first time only.)
4. Go to your Android device's Bluetooth list and pair with [8BitDo Ultimate 3mode Xbox], the **LED indicator** will stay solid when the connection is successful.

Apple®

- iOS 18.2, iPadOS 18.2, tvOS 18.2, macOS 15.2, visionOS 2.2 or above is required.

Apple®, iPadOS®, macOS®, and tvOS® are trademarks of Apple Inc., registered in the U.S. and other countries.


Bluetooth connection

1. Turn the mode switch to **Mobile/Bluetooth** position.
2. Press the **Xbox button** to turn on the controller.
3. Hold the **Pairing button** for 3 seconds to enter the pairing mode, the **LED indicator** will blink rapidly. (This is required for the very first time only.)
4. Go to your Apple device's Bluetooth list and pair with [8BitDo Ultimate 3mode Xbox], the **LED indicator** will stay solid when the connection is successful.

Volume Control

- Press and hold the following button combos to adjust the balance between voice and game volume.
- Beeps when adjusted to maximum/minimum, vibration when adjusted to middle value.
- 3.5mm earphones are not supported when connected via Bluetooth.

Press and hold the **Profile button + D-pad up/down** to turn up/down in-game volume.
Press and hold the **Profile button + D-pad left/right** to adjust the balance between voice and game volume.

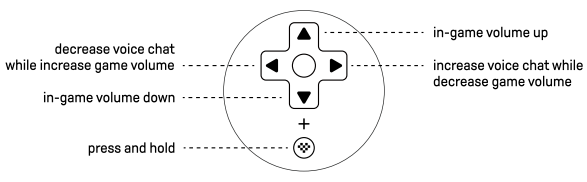

Fast Button Swap

- The Fast Button Swap feature is temporary and will revert to default settings upon reconnection. For permanent button configuration, please use Ultimate Software X.
- The **Profile LED indicator** will blink continuously when the swapped button is pressed.
- **D-pad, View, Menu, Share, Xbox, LT**, and **RT** buttons are not supported for the button swap.
- Press and hold any of the two buttons, then press the **Star button** to activate the Fast Button Swap. Repeat the same procedure or reconnect the controller will deactivate the function.

P1/P2 Button Configuration

- Only one button on the controller can be remapped to the **P1/P2 button**; remapping multiple buttons are not supported.
- **D-pad, View, Menu, Share, Xbox, LT**, and **RT** buttons are not supported for configuration.
- Press and hold [**P1/P2 button** + the button you wish to configure], then press the **Star button** to complete the configuration. To cancel, press and hold [**P1/P2 button** + Star button].

Battery

- Built-in 1000mAh rechargeable lithium battery with 20 hours of play time over 2.4G connection and 25 hours over Bluetooth connection, with a charging time of 4 hours.

controller status —	**LED indicator —**
Low battery →	Red LED blinks
Battery charging →	Green LED blinks
Battery fully charged →	Green LED stays solid

The LED indicator status of the charging dock	
Charging →	Amber light stays solid
Fully charged →	White light stays solid

- The controller will automatically shut down if it fails to connect within 1 minute of startup, or if there are no operations within 15 minutes after establishing a connection.
- The controller will not shut down during wired connection.

Safety Warnings

- Please always use batteries, chargers, and accessories provided by the manufacturer.
- The manufacturer is not liable for any safety issues arising from the use of non-manufacturer-approved accessories.
- Do not attempt to disassemble, modify, or repair the device yourself. Unauthorized actions may result in serious injury.
- Avoid crushing, disassembling, puncturing, or attempting to modify the device or its battery, as these actions can be dangerous.
- Any unauthorized changes or modifications to the device will void the manufacturer's warranty.

Ultimate Software X

- Press the **Profile button** to activate, switch or deactivate the customized profiles. There is no profile in the default setting.

Please visit app.8bitdo.com to access the application. It offers elite control over every aspect of your controller: customize button mapping, adjust the sensitivity of analog sticks and triggers, and control vibration intensity.

Re-pair the Controller and Adapter

If the connection is lost or the adapter needs to be re-paired, you can follow the steps below to re-pair the controller with the adapter:
1. Turn the **mode switch** to **PC/2.4G** position.
2. Connect the **2.4G adapter** to your Windows device.
3. Press the **Xbox button** to turn on the controller.
4. Hold the **Pairing button** for 3 seconds to enter the pairing mode, the **LED indicator** will blink rapidly.
5. Both **LED indicators** on the controller and receiver will become solid when the connection is successful.

Support

- please visit support.8bitdo.com for further information & additional support.