8BitDo®


Instruction Manual

Retro Mechanical Keyboard 01


8BitDo®

Retro Mechanical Keyboard


English

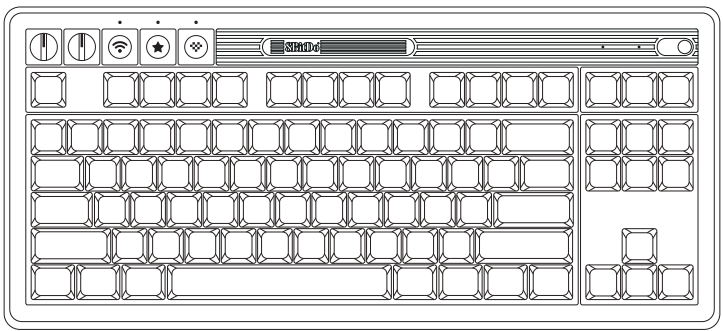


1

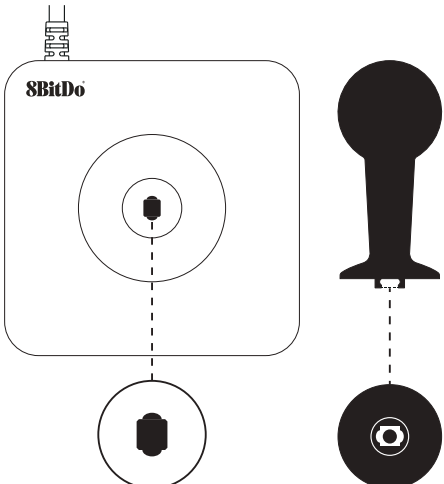

2

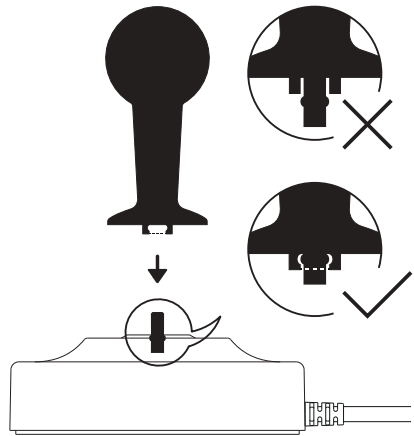

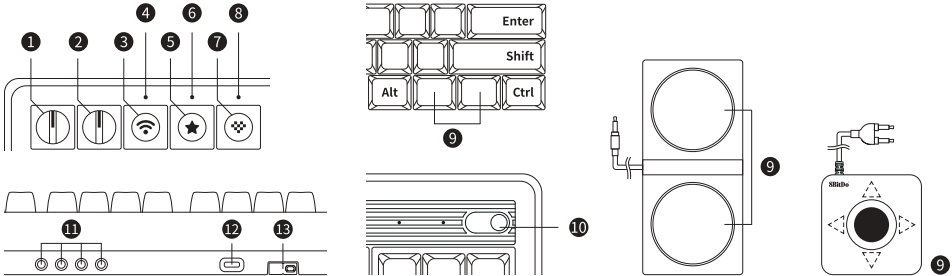

- **Interfaces for 8BitDo Super Buttons** are for **8BitDo Keyboard Extensions** only.
- System requirements for devices with built-in Bluetooth Low Energy or USB port:
  - Windows 10(1903) or above
  - Android 9.0 or above
- Factory Reset: Hold the **Pair button + Fast key mapping button + Profile button** for 5 seconds, all the LED indicators will start to blink. (All custom profiles, Bluetooth pairing, key mappings, and swapped keys will be reset.)

---

1. **Mode switch**
2. **Volume knob**
3. **Pair button**
4. **Connection indicator**
5. **Fast key mapping button**
6. **Key mapping indicator**
7. **Profile button**
8. **Profile indicator**
9. **Super buttons**
10. **Power indicator**
11. **3.5mm interfaces for Super Buttons and other extensions**
12. **USB Type-C port**
13. **2.4G Adapter / Adapter compartment**

Wireless Connection



1. Turn the **Mode switch** to **2.4**.



2. Connect the 2.4G adapter to the USB port of your device, the **Connection indicator** will remain solid for 8 seconds and then go off to indicate a successful connection.


Re-pair the Keyboard and the Adapter:

1. Turn the **Mode switch** to **2.4**.
2. Hold the **Pair button** for 3 seconds to enter its pairing mode, the **Connection indicator** will start to blink rapidly.
3. Connect the adapter to the USB port of your device.
4. The **Connection indicator** will remain solid for 8 seconds and then go off to indicate a successful connection.

Wired Connection



1. Turn the **Mode switch** to **OFF**.



2. Connect the keyboard to the USB port of your device and wait till the keyboard is successfully recognized by your device before using it.

Bluetooth Connection





3 seconds

1. Turn the **Mode switch** to **BT.**

2. Hold the **Pair button** for 3 seconds to enter its pairing mode, the **Connection indicator** will start to blink rapidly. (This is required for the very first time only.)





8BitDo Retro Keyboard

3. Go to your device's Bluetooth list and pair with **"8BitDo Retro Keyboard"**, the **Connection indicator** will remain solid for 8 seconds and then go off to indicate a successful connection.

Battery


200 hours of usage time with a 2000mAh built-in battery, rechargeable with 4 hours charging time.


Status		**LED indicator**
Low battery	⟶	Power indicator blinks
Battery charging	⟶	Power indicator breathing
Fully charged	⟶	Power indicator stays solid

- The keyboard will automatically shut down if it fails to connect within 1 minute of startup, or if there are no operations within 15 minutes after establishing a connection.
- The keyboard will not shut down during wired connection.
- Charging and battery life depend on variations in settings or environmental factors, and actual results may vary.

Fast Key Mapping

- You can assign up to 6 keys to **a Programmable key** at the same time.
- Press the **Fast key mapping button** first, then press the **Programmable key** to cancel the mapped key. Hold the **Fast key mapping button** for 5 seconds to clear all the fast key mappings.
- The **Key mapping indicator** will blink rapidly when the mapped Programmable button is pressed.
- The fast key mapping mode will automatically exit after 60 seconds of no activity.

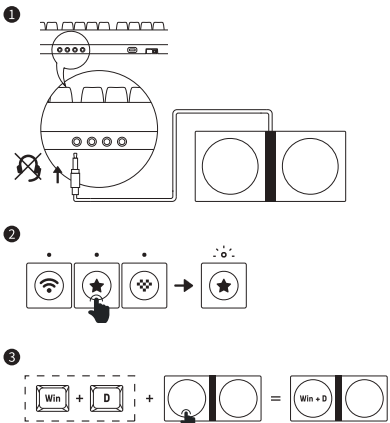

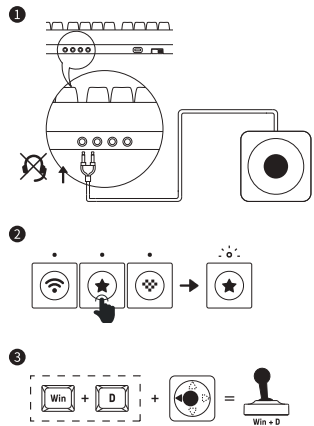

Fast Key Swap

- Swappable keys: Ctrl, Win, Alt and Shift.
- The **Key mapping indicator** will blink rapidly when the swapped key is pressed.

For example:



Custom Profile/Macro/Firmware Update

Please visit app.8bitdo.com to download the **Ultimate Software** to get the latest firmware & additional support.

Support

Please visit support.8bitdo.com for further information & additional support.

Safety Warnings

- Please always use batteries, chargers, and accessories provided by the manufacturer.
- The manufacturer is not liable for any safety issues arising from the use of non-manufacturer-approved accessories.
- Do not attempt to disassemble, modify, or repair the device yourself. Unauthorized actions may result in serious injury.
- Avoid crushing, disassembling, puncturing, or attempting to modify the device or its battery, as these actions can be dangerous.
- Any unauthorized changes or modifications to the device will void the manufacturer's warranty.



Manual